

## WEL SERIES


Walchem's WEL Series electrodes are cost-effective differential pH and ORP electrodes for industrial applications. They are modular in design with a rugged CPVC housing that contains the electronics; pH and ORP cartridges can easily be connected or replaced in minutes without tools. The cartridges feature a unique threaded interlock connection and a double o-ring seal, ensuring a watertight fit and secure seating at all times.

The optional differential preamplifier and temperature compensation element are in the housing, and are not thrown away when the electrode needs replacement. The electrode is powered by the controller it is connected to, so the signal is always preamplified and there are no batteries to go dead. A titanium solution ground rod integral to the housing enables the differential measuring technique. This results in prolonged electrode life and reliable measurement, resistance to stray voltages and currents or ground loop problems.



## SUMMARY OF KEY BENEFITS

- » Differential preamp
- » Universal mounting
- » Easily replaceable electrode cartridges
- » Electronics are not discarded with the electrode
- » Optional ATC
- » Easy to install
- » Cartridge Styles:
  - Flat Surface
  - Bulb / Rod
  - HF Resistant
- » Resistant to electronic noise, ground loops
- » CE Performance & Safety Certifications



## ORDER INFORMATION



### CARTRIDGE

- PHF = Flat surface pH
- PHB = Bulb pH
- PHH = HF resistant pH
- MVF = Flat surface ORP
- MVR = Rod style ORP
- PHLI = Flat pH, if sample is between 10 and 100 $\mu$ S

### HOUSING

- 1 = Housing with preamplifier and PT1000 ATC, 20' cable with tinned leads
- 2 = Housing with preamplifier, 20' cable with tinned leads
- 3 = Housing with PT1000 ATC, 20' coaxial cable with BNC connector
- 4 = Housing, 20' coaxial cable with BNC connector

## SPECIFICATIONS

### pH/ORP Electrode

Range	0 to 14 pH (0 to 12 without sodium ion error $\pm$ 1999 mV (ORP))
Response	95% in less than 5 seconds
Impedance:	
Cartridge	Not to exceed 1000m $\Omega$ over temp range
Housing	100 $\Omega$ , preamplified versions Not to exceed 1000m $\Omega$ over temp range non-preamplified versions
Operating Pressure	100 psig

### Temperature Range

Housings with preamplifier	32 to 158°F (0 to 70°C)
Housings without preamplifier	32 to 212°F (0 to 100°C)
PHF, MVF, MVR & PHLI	50 to 212°F (10 to 100°C)
PHB cartridges	32 to 212°F (0 to 100°C)
PHH cartridges	32 to 122°F (0 to 50°C)

Note: Electrode life is drastically reduced when used at temperatures above 122°F (50°C).

### Wetted Materials of Construction

Electrode body	CPVC
Electrode reference	HDPE
O-rings	FKM
Electrode	Glass (pH) or platinum (ORP)

The WEL Series electrodes are in compliance with CE EMC standards.

### MOUNTING STYLE

- 1 = Submersion mounting
- 2 = In-line mounting (3/4" NPTF tee)
- 3 = Metric in-line mounting (G 1 1/4 male adapter)

## WDS SERIES

Walchem's WDS Series differential pH and ORP sensors will provide long-lasting and reliable performance in industrial and municipal applications.

The differential measurement technique uses two electrodes, one for the process measurement and the other for the reference measurement. Each electrode is measured differentially with respect to a third metal electrode. The reference electrode is constructed from pH glass and is embedded in pH 7 buffer within the sensor behind a porous, replaceable salt bridge. If the reference solution becomes contaminated, or the salt bridge becomes clogged, it is easily replaced. The glass electrode is not prone to chemical attack like a silver/silver chloride reference can be, adding to the reliability of the sensor.



### SUMMARY OF KEY BENEFITS

- » Replaceable salt bridge for long life
- » Field proven differential design
- » Transmits signal 3,000 feet (915 meters)
- » Walchem preamplifier models are compatible with Walchem controllers
- » Conventional preamplifier models are compatible with GLI and Aquamatrix (Lisle Metrix) controllers
- » Resistant to ground loop problems

### SPECIFICATIONS

#### Measurement Performance

Range 0 to 14 pH  
-2000 to 2000 mV (ORP)

Sensitivity 0.001 pH  
0.1 mV

Stability 0.03 pH per day, non-cumulative  
2 mV per day, non-cumulative

Temperature -5 to 95°C (23 to 203°F)



#### Mechanical

Wetted Materials CPVC, Ceramic, Glass, EPDM, Platinum (ORP only) and Titanium  
Palladium alloy

Cable (Walchem preamp) 3 twisted pair shielded  
Cable (Conv. preamp) 5 conductor shielded  
Cable length 4.6 meters (15 ft)  
Maximum cable length 900 meters (1,000 ft)

Temperature Limit -5 to 95°C (23 to 203°F)  
Pressure Limit 0.7 MPa (100 psi)  
@65°C (149°F)

The WDS Series (model numbers WDS-\*\*W, Walchem preamplifier only) sensors are in compliance with CE EMC EN 61326 standards.

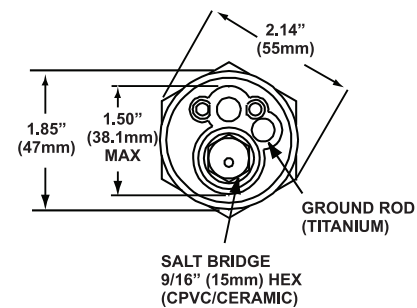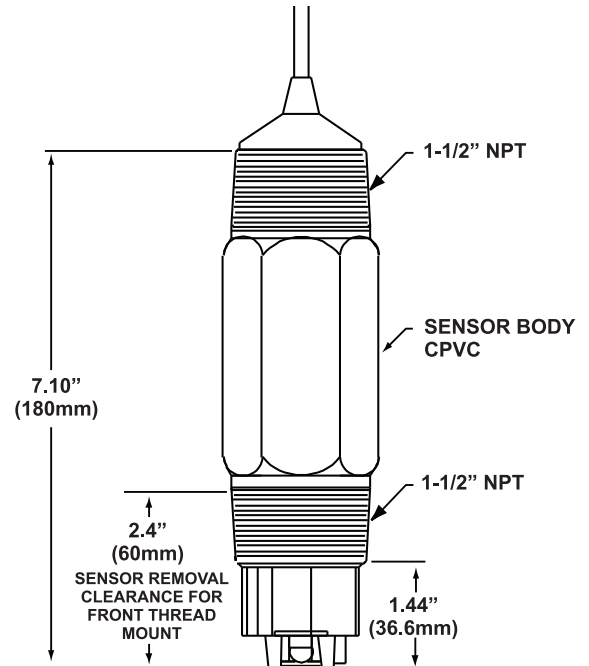

### ORDER INFORMATION

WDS —  sensor type  preamp type

**SENSOR TYPE**  
PH = pH sensor  
MV = ORP sensor

**PREAMPLIFIER TYPE**  
W = Walchem preamplifier  
C = Conventional preamplifier

## HIGH PRESSURE & HIGH TEMPERATURE pH & ORP ELECTRODES

The 102029 pH electrode and 102963 ORP electrode are designed to function where other electrodes cannot. In room temperature water, they can handle up to 500 psi. In low pressure installations, they can handle up to 275°F (135°C) without melting.

In all cases, pH/ORP electrode life will be maximized by operating at room temperature, and the expected life span at temperatures above 140°F (60°C) will be short. But if low temperature operation is impossible, these electrodes will fit the bill.



### SUMMARY OF KEY BENEFITS

- » Higher temperature rating
- » Steam sterilizable
- » High operating pressure
- » Booted BNC, waterproof cable

### ORDER INFORMATION

- 102027** Mounting Gland, SS, 3/4" NPT, High Temperature/Submersion (pH/ORP)
- 102028** Mounting Gland, SS, 3/4" NPT, High Temperature/In-line (pH/ORP)
- 102029** Electrode, pH, High Temperature, 10 ft. cable
- 102963** Electrode, ORP, High Temperature, 10 ft. cable

### SPECIFICATIONS

Reference cell	Double junction, Na <sub>2</sub> SO <sub>4</sub> + KCl / Ag - Ag - AGCl
Cable lead	10 FT. (3.05 m) length with BNC connector
Membrane impedance (pH)	150 megaohms at 78°F (25°C)
Zero potential (pH)	0 mV ± 12 @ pH 7
Operating Temperature	23° to 275°F (-5° to 135°C) @ 200 PSI (1.38 MPa)
Operating Pressure	500 PSI (3.45 MPa) @ 77°F (25°C)
Range	0 to 14 pH, -1000 to 1000 mV
Output voltage (pH)	58.7 ± 0.3 mV per pH unit
Drift	Less than 2 mV per week
Sodium error (pH)	Less than 0.5 pH unit typical in 0.1 Na+ @ 12.8 pH

#### Dimensions

5" (127 mm) length x 0.47" (12 mm) diameter  
Gland thread size 3/4" NPTM (3/4" G)

#### Materials of Construction

PFA junction  
Glass membrane (pH and ORP)  
Platinum (ORP)  
Polymer body  
SS mounting gland

## pH/ORP PREAMPLIFIER

The Walchem preamplifier offers a watertight way to extend the cable of any conventional combination pH/ORP electrode as far as 1000 feet (305 meters). Simply connect the electrode to the BNC connector, the optional ATC cable to the terminal block inside and run cable to the controller.

Walchem controllers provide the ±5VDC power required to operate the preamp. For connection to controllers that have only a BNC connector for the sensor input, specify the 190829 version, which includes a male BNC to connect to the controller end of the cable.



### SUMMARY OF KEY BENEFITS

- » NEMA 4X, epoxy coated, die-cast aluminum wall mount enclosure
- » Boosts signal for reliable transmission up to 1,000 ft (305 m) via 22 AWG wire
- » No temperature simulation resistor required when used with Walchem controllers

### ORDER INFORMATION

- 190783** pH/ORP Preamplifier
- 190829** pH/ORP Preamplifier with additional BNC connector for controller connection
- 100084** Four conductor cable for use with manual temperature compensation
- 102535** Six conductor cable for use with automatic temperature compensation

### SPECIFICATIONS

Power	±5 VDC, 5mA maximum
Input Impedance	1 x 10 <sup>13</sup> ohms
Connections	BNC for pH/ORP Screw terminals
Overall Dimensions	4 7/8" (L) x 3 1/8" (W) x 2 1/4" (H)
Mounting Dimensions	4 7/16" (L) x 2 1/16" (H)
Enclosure	Grey epoxy coated Aluminum NEMA 4X



### Webmaster®ONE

WebMasterONE is the most advanced online cooling tower and boiler controller in the water treatment industry. The flexible multi-I/O platform allows you to control multiple cooling towers, boilers, closed loops, and condensate lines with just one controller. An extensive assortment of integrated communications and data handling features are included that enable water treatment professionals to provide more effective water management services to their customers.



### WIND WebMaster Industrial Water Controllers

Walchem's WebMaster® Industrial (WIND) Controller sets a new standard for Industrial Water Treatment Controllers. WIND has a flexible multi-I/O platform, a wide range of analytical sensor measurement capabilities, and an extensive assortment of integrated communications and data handling features.



### Metering Pumps

The E-Class is the most innovative and comprehensive metering pump product line in the world. Over 50 years of pump experience and a commitment to superior mechanical design has led to development of many industry firsts, including 360 stroke-per-minute technology, IP67 waterproof construction, and the world's highest capacity solenoid metering pumps.



### WebAlert Remote Monitor

Walchem's WebAlert is the first stand alone remote monitoring device that can web enable your installed equipment without having to replace or upgrade it.

## ABOUT US

Walchem integrates its advanced sensing, instrumentation, fluid pumping and communications technologies to deliver reliable and innovative solutions to the global water treatment market

Our in-house engineering is driven by quality, technology and innovation. For more information on the entire Walchem product line, visit: [www.gene-sea.com](http://www.gene-sea.com)



 <b>锦贤科技</b> <small>GENESEA TECHNOLOGY CO., LTD.</small>	深圳市锦贤科技有限公司 SHENZHEN GENESEA TECHNOLOGY CO., LTD. 电话: 0755-36838322 传真: 0755-28226934 网站: <a href="http://www.gene-sea.com">www.gene-sea.com</a> 邮箱: <a href="mailto:genesea@126.com">genesea@126.com</a> Q Q: 510244122 32174454
---	--